


# AP – 12.5mm MR ACCESS PANEL MR BOARD

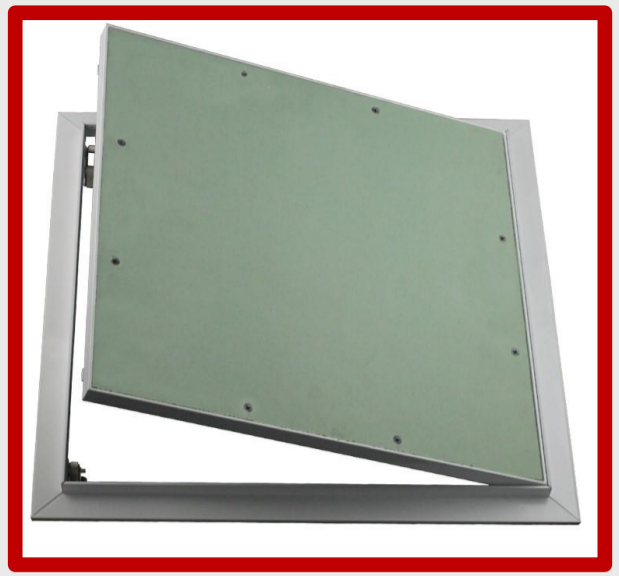

## Description

Gypsemna Access Panels are non-fire rated with a gypsum board face, which provide easy access to gypsum board ceilings and/or gypsum board partitions. Gypsemna Access Panel frames are manufactured from a stable Aluminum profile, which is white powder coated (RAL 9016). Gypsemna Access Panel has a flush fitted 12.5 mm Gypsemna Moisture Resistant Board infill. Gypsemna Access Panels are fitted with high quality concealed spring loaded push open and push close locking mechanisms and are fitted with a 1.5 mm laminated G.I wire with an eyelet hook for partial or full opening of the access panel door.

## Basic Uses

Gypsemna's AP Access Panel Moisture Resistant Board is used for interior walls and ceilings for access to utilities and services.

## Technical Data

### Physical Properties

Thickness, Nominal	15mm
Width, Nominal	300mm, 450mm, 600mm
Length, Standard	300mm, 450mm, 600mm
Weight, Nominal	13.0kg +/- 0.20 kg/m <sup>2</sup>
Colour	Green
Custom Sizes	Available on request

## Advantages

- Consistently high quality.
- Uniformly flat, attractive appearance, no shadows
- High edge hardness.
- Uniform high-strength cores eliminate crumbling, cracking.

- Complies EN520 Types A and H1
- Complies ASTM C 1396/C and ASTM C 1396/M

## Get in touch

[info@gypsemna.com](mailto:info@gypsemna.com)  
[www.gypsemna.com](http://www.gypsemna.com)

[technical@gypsemna.com](mailto:technical@gypsemna.com)  
[linkedin.com/company/gypsemna-company-llc/](https://www.linkedin.com/company/gypsemna-company-llc/)

