


# UHDU Track

# METAL

# PROFILES

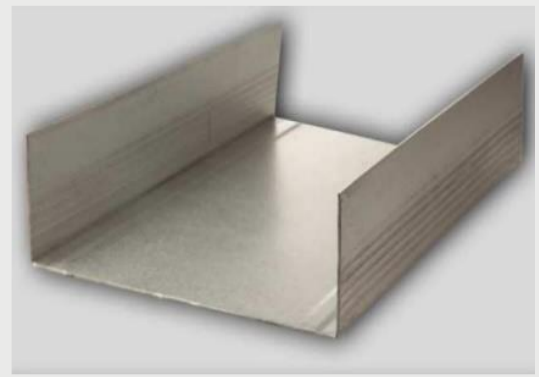

## Description

Gypsemna's ULTRA HEAD DEFLECTION U TRACK section provides a friction for the stud, which not only holds the studs in position until the lining board is fitted, but also helps in aligning the boards. Components for drywall stud and track products are cold roll-formed from hot-dipped galvanized steel (corrosion resistant) and are available in a variety of sizes and thicknesses.

## Basic Uses

Gypsemna's ULTRA HEAD DEFLECTION U TRACK is the horizontal top elements of drywall structure into which the corresponding vertical Gypsemna's C STUD is fitted, allows a vertical movement from the ceiling/ roof. This vertical deflection prevents loads from being transferred to the studs. Strong non load bearing component for exterior and interior drywall partition, ceilings and liners.

## Advantages

- For all areas requiring a smoothly finished, monolithic wall plane
- Fire Resistant Ratings
- Flexibility of configuration
- Dimensionally stable
- Impervious to rot, fungal and insect attack
- Corrosion resistant.
- Won't warp, twist or bow
- Easily worked, few tools required
- Non-combustible

## Technical Data

### Physical Properties

Coating	Z275 Zinc coating / Z180 Zinc coating / Z120 Zinc coating
Standard Compliance	ASTM C645 / ASTM A653 / ASTM A645 / ASTM A370
Material	Cold roll-formed from hot-dipped galvanized steel
Grade	G300
Min Yield Strength	300mpa
Min Tensile Strength	340mpa
Thickness	0.50mm, 0.55mm, 0.60mm, 0.70mm, 0.80mm, 0.90mm, 1.0mm, 1.10mm, 1.20mm, 1.30mm and 1.50mm
Flange	70mm
Width	52mm, 66mm, 72mm, 78mm, 94mm, 102mm, 127mm and 152mm
Length	3000mm

## Get in touch

[info@gypsemna.com](mailto:info@gypsemna.com)  
[www.gypsemna.com](http://www.gypsemna.com)

[technical@gypsemna.com](mailto:technical@gypsemna.com)  
[linkedin.com/company/gypsemna-company-llc/](https://www.linkedin.com/company/gypsemna-company-llc/)

